




**95% Dry Vapor
Steam Cleaner**

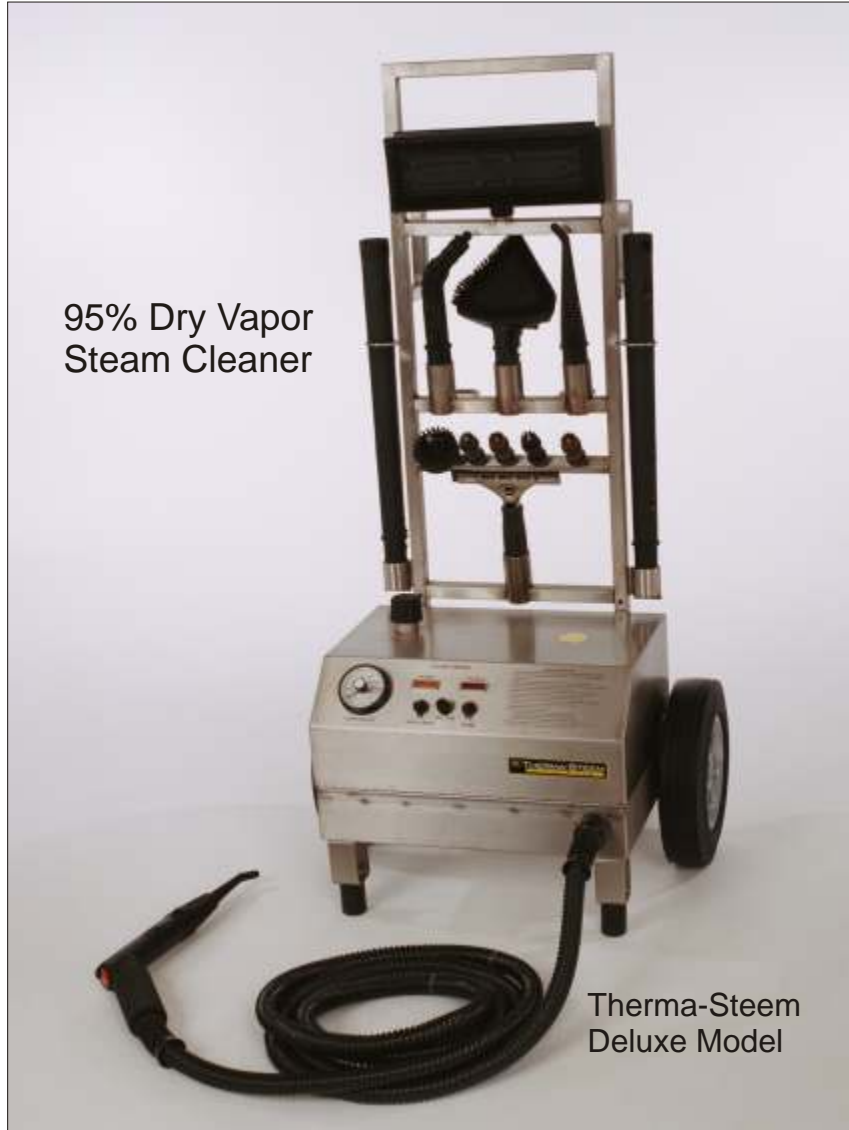

Therma-Steem
Deluxe Model

Specifications:

- Temperature: max. 330 F/170 C
- Pressure: max. 100 p.s.i./6.8 bar
- Machine Size: 21.25"W, 13.5"H, 16.5"D
- Height: Handle height measures 42.5" from the floor
- Handle and body material: Stainless steel
- Weight: 70 lbs.
- Electrical: 110v/15 amps, or 220v/7.5 amps.
- Boiler Size: 1.5 gallon
- Boiler Material: 304 stainless steel
- Heating Element: Incoloy 800
- Wheels: 10" Semi-pneumatic
- Stair climber attachment bolts to the handle and body

Features:

- Low water alarm and cut-off.
- Temperature gauge with adjustable high limit switch.
- 14 ft .wand has low, medium and high switches at the gun.
- Removable handle.
- Storage on the handle for each accessory.
- 1.5 gallon boiler for longer cleaning times between fill-ups.

Warranty:

1 year on all parts, 5 years on the boiler.



Stair climber attachment

Accessories:



14 ft. wand with low, med. & high pressure switch at the gun.

19" Extensions

Triangle Brush with clips

Single Hole Nozzle

Squee-gee

Funnel

2 1/2"Nylon Brush

1" Nylon, Brass & Stainless steel Brushes

Floor Brush with clips and a locking extension

As an American made Vapor Steam Cleaner, the THERMA-STEEM model is easy to use. Just pour water into the stainless steel boiler, plug into an electrical outlet and within minutes the cleaner will be ready to deliver powerful cleaning pressures of up to 100 p.s.i./6.8 bar pressure at 330 F/ 170 C temperature.

This model is ideal for sanitizing and de-greasing areas where water should not or cannot be used; i.e. interior areas such as kitchen ovens, floors, tile, grout and refrigerators; also for carpets and seating areas; for auto detail shops, food processors, industry, schools and universities, kills bed bugs, restroom sanitation, food safety, removes gum, disinfects and deodorizes hotel rooms, mattresses, etc.



Headquarters: 10212-A South Mandel Street, Plainfield, Illinois 60585

www.Therma-Kleen.com E-Mail: Steamtk@aol.com Phone: 630-718-0212/800-999-3120 Fax: 630-305-8696