


Designed to Clean-Degrease-Sanitize-Disinfect and Kill Bacteria

**Electric High Pressure Steam Cleaners
Ultra 250E/ 600E Models**



Optional Stainless Steel body for Electric Models

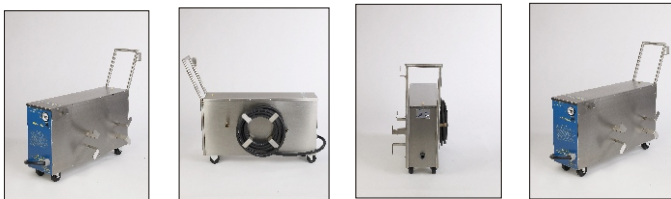

Therma-Kleen Electric Steam Cleaners are efficient, safe and easy to use. Simply connect a garden hose to the inlet, connect the pressure hose and wand to the output, plug in the power and the unit is ready to use. As water goes through the unit it's heated by electricity and pressurized. In approx. two to three minutes you are ready to clean, de-grease, and sanitize by killing bacteria. Both Therma-Kleen models (Ultra 250E and Ultra 600E) combine low water flow with high temperature under pressure to allow efficient cleaning. The portability of Therma-Kleen electric steam cleaners makes them ideal for indoor use. These units are specially designed for cleaning situations where other fuels are restricted. USDA allowable.

The Therma-Kleen Ultra 250E is lightweight, compact and easy to use. The Ultra 250E is designed to clean specific areas such as equipment and small areas generally under 1,000 sq. ft.

The Therma-Kleen Ultra 600E is similar to the Ultra 250E, but has more than twice the pressure and a little less water volume. As a result, it has faster cleaning action.

Included Accessories:



Optional Accessories:
50' or 100' steam hose
2 1/2' wand or snub nose wand

Instructional DVD and
owners manual

Specifications for the Ultra 250E:

Burner Outlet: 21kW/73,000 btu/hr.
Water Volume: .25-1.5 gpm*
Max. Input temperature: 140°F/60°C
Max Output temperature: 255-275°F/120-140°C
Output Pressure: 250 PSI/ 17 bar
Electrical: 52/28 Amps 208/220/480 VAC, 3 phase, 50/60 hz
Weight: 145
Dimensions: 10" W x 35" L x 22" H 38" handle height
Wheels: 2 front casters, 2 back rigid
*Water volume pumps are also available in .5 gpm and 1.0 gpm

Specifications for the Ultra 600E:

Burner Outlet: 21kW/73,000 btu/hr.
Water Volume: 1.5 gpm
Max Input temperature: 140°F/60°C
Max Output Temperature: 250-275°F/120-140°C
Output Pressure 600 PSI/ 41 bar
Electrical: 52/28 Amps 208/220/480 VAC. 3 phase, 50/60 hz
Weight: 150 lbs.
Dimensions: 10" W x 35" L x 22" H 38" Handle height
Wheels: 2 Front casters, 2 back rigid

Safety Features:

High Temperature Limit switch
Pressure Relief valve
Flow switch